



Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Recommended P.C.Board
 Hole Layout
 (Tolerance: ± 0.05)



ROHS COMPLIANT

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T(Processing temp.260°C,10sec)

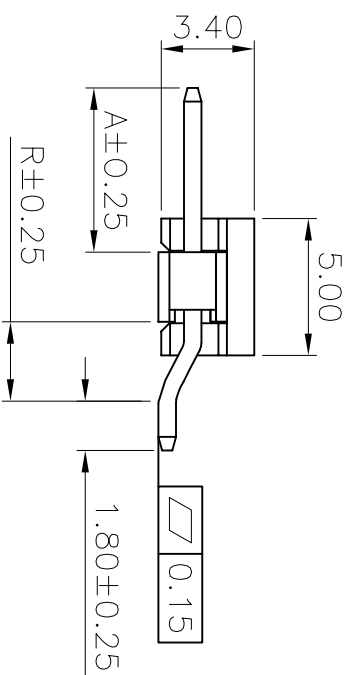

Ordering Information

HMNSSHX	-	XX	XX	XXX	T	B	X	X
Material High	No. of Pins	Standard Plating	Pin Length	Material	Material	Material	Post	Packing
1=1.5MM	Per Row	01=Gold Flash	001=A=6, 0/2, 8	L=CP	B=Brass	P=Phosphoric	P=With Post	TR=Tube
2=2.54MM	03-40	02=Gold 3U"	XX=Select A/R	T=NI6T	Brass	W=Without Post	T=Tube	
		11=11in	XX=Select Plating					

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	FILE NAME (品名) 億濠得股份有限公司
X. \pm ± 0.38 .X ± 0.25 .XX ± 0.13	X. $\pm 5^\circ$.X $\pm 2^\circ$.XX $\pm 1^\circ$.XXX $\pm 0.5^\circ$	Andy2005.08.12		
UNIT: mm	SCALE 1:1	CHECK	DATE	FILE NAME (品名) 2.54MM Header SMT TYPE
A4	SHEET: 1 of 1	APPRO.	DATE	PART NO (料号) HMNSSHX-XXXXXXXXLBX
				DRAWING NO.(图号) HMNSSHX-05
				REV/AO

ELETE TECHNOLOGY CO., LTD