
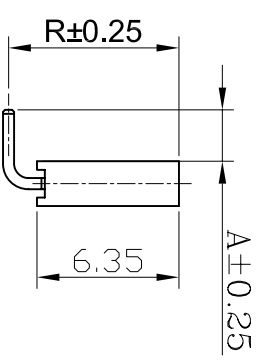


Recommended P.C.B. Layout

Tolerance: 0.05mm

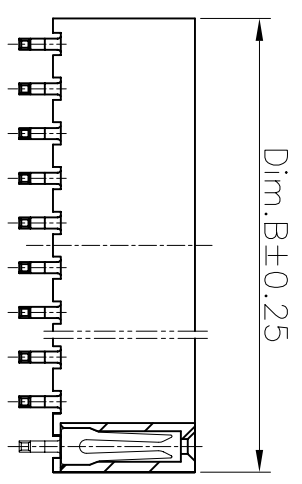

PN/R/W	Dimension Information	
	A	B
02	2.00	4.30
03	4.00	6.30
04	6.00	8.30
05	8.00	10.30
06	10.00	12.30
07	12.00	14.30
08	14.00	16.30
09	16.00	18.30
10	18.00	20.30
11	20.00	22.30
12	22.00	24.30
13	24.00	26.30
14	26.00	28.30
15	28.00	30.30
16	30.00	32.30
17	32.00	34.30
18	34.00	36.30
19	36.00	38.30
20	38.00	40.30
21	40.00	42.30
22	42.00	44.30
23	44.00	46.30
24	46.00	48.30
25	48.00	50.30
26	50.00	52.30
27	52.00	54.30
28	54.00	56.30
29	56.00	58.30
30	58.00	60.30
31	60.00	62.30
32	62.00	64.30
33	64.00	66.30
34	66.00	68.30
35	68.00	70.30
36	70.00	72.30
37	72.00	74.30
38	74.00	76.30
39	76.00	78.30
40	78.00	80.30

- Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -55°C to +105°C
- Materials
 Contact Material: Phosphor Bronze.
 Insulator Material: LCP UL94V-0,Color:Black.

ROHS COMPLIANT

Ordering Information

HPLSR5 -	XX	XX	XXX	L
No. of Pins	Standard Plating	Pin Length	Material	
Per Row	01=Gold Flash	001 =2, 3/7, 6	L=LCP	
02-40	02=Gold 3U"	XX=Select A/R	T=NL6T	
	11=Fin			
	XX=Select Plating			

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	ELFTE TECHNOLOGY CO., LTD 億溙得股份有限公司
X, X ±0.38 XX ±0.25 XXX ±0.13	X, X ±5 XX ±2 XXX ±1	Andy/2005.08.12		
UNIT:mm	SCALE 1:1	APPRO.	DATE	FILE NAME (品名)
A4	SHEET: 1 of 1			2.0MM Female Header R/A TYPE
				PART NO (料号)
				HPLSR5-XXXXXXXXXL
				DRAWING NO.(图号)
				HPLSR5-01
				REV:AO