


ROHS COMPLIANT

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 Nylon 6T(Processing temp.260°C,10sec)

RECOMMENDED P.C.B LAYOUT

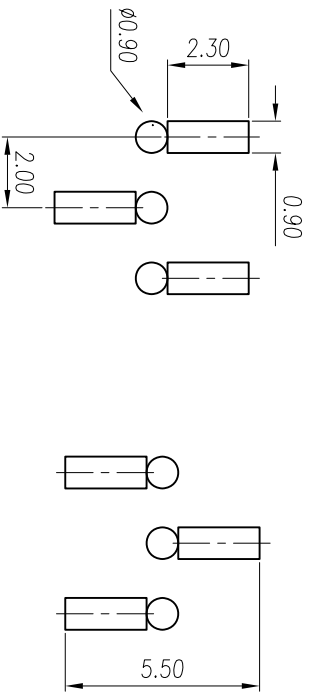

Ordering Information

| | | | | | | |
|---------------------|--|-------------------------|-----------------|------------------------|---|---|
| HFLSSV2 | - | XX | XX | XXX | T | X |
| No. of Pins Per Row | Standard Plating | Pin Length | Material | Packing | | |
| 02-40 | 01=Gold Flash 02=Gold 3U" 11=11in XX=Select Plating | 001=4.5 XXX=Select W | L=LCF T=NL6T | TK=Tape+Reel T=Tube | | |

| | | | | |
|--|--|----------------|-------------|--|
| GENERAL TOLERANCE | ANGLE TOLERANCE | DESIGN | DATE | FILE NAME (品名) 億速得股份有限公司 |
| X. ± .XX ±0.38 .XXX ±0.25 XXX ±0.13 | X°. ±5° XX° ±2° XXX° ±1° XXX° ±0.5° | Andy2005.08.12 | | |
| UNIT:mm | SCALE 1:1 | APPRO. | DATE | FILE NAME (品名) 2.0mm Female Header SMT |
| A4 | SHEET: 1 of 1 | | | PART NO (料号) HFLSSV2-XXXXXXXXTX |
| | | | | DRAWING NO.(图号) HFLSSV2-05 |
| | | | | REV:A0 |