


ROHS COMPLIANT

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 Nylon-6T

Recommended P.C.Board
 Hole Layout

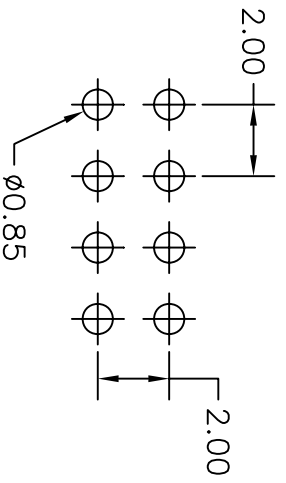

Ordering Information

HFLDS1 - XX XX XXX T

No. of Pins Standard Plating Pin Length Material
 Per Row 01=Gold Flash 001 =2.4 L=ICP
 02=Gold 3U" 002=Gold 3U" T=NL6T
 11=Tin
 X=Select Plating

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	FILE NAME (品名)	2.0MM Female Header DIP TYPE
X. ± .X ±0.38 .XX ±0.25 .XXX ±0.13	X. ±5' .X ±2' .XX ±1' .XXX ±0.5'	Andy2005.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	DRAWING NO.(图号)	HFLDS1-01
A4	SHEET: 1 of 1				REV:A0

ELEETE TECHNOLOGY CO., LTD
 億潔得股份有限公司