


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 PBT

ROHS COMPLIANT

Recommended P.C.Board
 Hole Layout

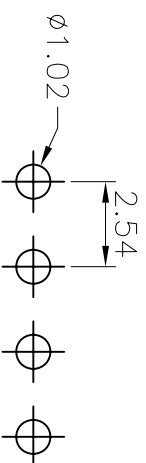

Ordering Information

HFNSS38 - XX XX XXX P
 No. of Pins Standard Plating Pin Length Material
 Per Row 01=Gold Flash 001 =3.3 I=CP
 02-40 XX=Select Plating XXX=Select A T=MT
 P=PBT

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	ELEETE TECHNOLOGY CO., LTD 億得得股份有限公司
X. ± X. ±0.38 .XX ±0.25 .XXX ±0.13	X. ±5' X' ±2' XX' ±1' .XXX' ±0.5'	Andy/2005.08.12		
UNIT:mm	SCALE 1:1	CHECK	DATE	FILE NAME (品名)
A4	SHEET: 1 of 1	APPRO.	DATE	PART NO (料号)
				2.54MM Female Header DIP TYPE
				DRAWING NO.(图号)
				HFNSS8-XXXXXXXP
				HFISS8-01
				REV:A0