

Dim.B ± 0.25
A Type


1. Specifications:

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000MΩ Min.
- 1.3 Dielectric Withstanding: 600V AC/DC
- 1.4 Contact Resistance: 20mΩ Max.
- 1.5 Operating Temperature: -40°C to +105°C

2. Materials:

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
- A=02~24pins use P.B.T Black ;
- 25~40pins use Nylon6T Black
- B=02~40pins use Nylon6T Black

ROHS COMPLIANT

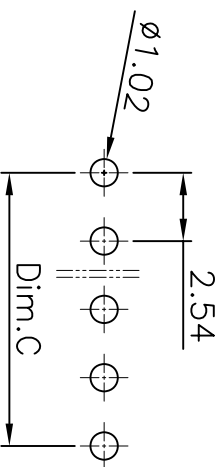

Recommended P.C.B. Layout
(Tolerance: 0.05mm)

Ordering Information

HFNSSH	-	XX	XX	XXX	P
No. of Pins	Standard Plating	Pin Length	Material		
Per Row	01=Gold Flash	001 =20/3, 4	L=LCP		
02-40	02=Gold 30"	XXX=Select A/B	T=NI6T		
	11=Flt		P=PBt		
	XX=Select Plating				

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	ELETE TECHNOLOGY CO., LTD 億濠得股份有限公司
X. ± 0.38 X. ± 0.25 .XXX ± 0.13	X. ± 5° X. ± 2° .XXX ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK	DATE	FILE NAME (品名)
A4	SHEET: 1 of 1	APPRO.	DATE	2.54MM Female Header DIP TYPE
				PART NO (料号) HFNSSH-XXXXXXXXXP
				DRAWING NO(图号) HFISSH-01
				REV:AO