


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 10000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

For 02~24pins, use the plastic materia of PBT, while 25~40pins using PA6T+20% recycle plastic

ROHS COMPLIANT

Recommended P.C.Board Layout
 (Tolerance: ±0.05)

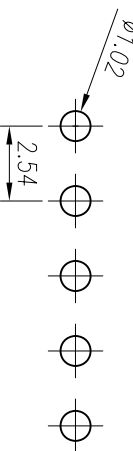

Ordering Information

HFNSS5Y - XX XX XXX P
 No. of Pins Standard Plating Pin Length Material
 Per Row 01=Gold Flash 001=3, 2 L=CP
 02=Gold 3μ 002=Select A T=AGT
 11=Tin P=PBT
 X=Select Plating

| | | | |
|----------------------------------|--|---------------------------|------|
| GENERAL TOLERANCE | ANGLE TOLERANCE | DESIGN | DATE |
| X. ±0.38 X ±0.25 .XX ±0.13 | X. ±5° X ±2° .XX ±1° .XXX ±0.5° | Andy2005.08.12 | |
| UNIT:mm | SCALE 1:1 | APPRO. | DATE |
| A4 | SHEET: 1 of 1 | | |
| FILE NAME (品名) | | ELETE TECHNOLOGY CO., LTD | |
| PART NO (料号) | | 億溙得股份有限公司 | |
| DRAWING NO.(图号) | | HFNSS5Y-XXXXXXXXP | |
| | | REV:A0 | |