


**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T

**ROHS COMPLIANT**

Recommended P.C.Board  
 Layout

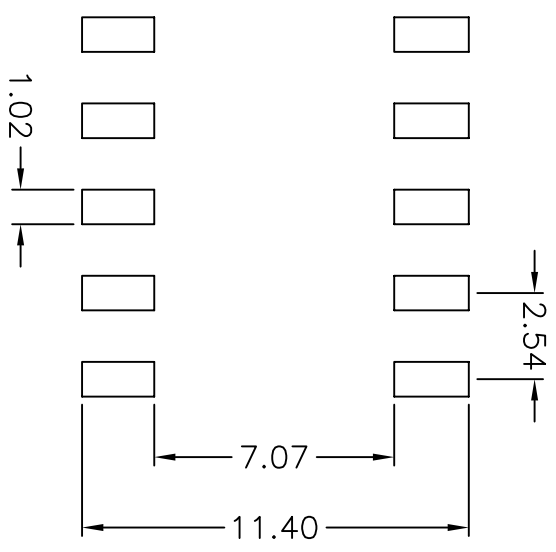

**Ordering Information**

LEDF1	-	XX	XX	XXX	P	B	X
No. of Pins	Standard Plating	Pin Length	Material	Material	Packing		
Per Row	01=Gold Flash	001=10.5	L=LCP	B=Brass	T=Tube		
02-40	02=Gold 30"	XXX>Select W	T=NI6T	P=Phosphoric Bronze	TP=Tube+Rel1		
	11=1in						
	XX>Select Plating						

<b>GENERAL TOLERANCE</b>	<b>ANGLE TOLERANCE</b>	<b>DESIGN</b>	<b>DATE</b>	<b>FILE NAME (品名)</b> LED Connector Female
X. ± 0.38 XX ± 0.25 XXX ± 0.13	X. ± 5° XX ± 2° XXX ± 0.5°	Andy2005.08.12	08.12	
<b>UNIT:mm</b>	<b>SCALE 1:1</b>	<b>APPRO.</b>	<b>DATE</b>	<b>PART NO (料号)</b> LEDF1-XXXXXXXXLBX
<b>A4</b>	<b>SHEET: 1 of 1</b>			<b>DRAWING NO(图号)</b> LEDF1-05
				<b>REV:AO</b>

ELETE TECHNOLOGY CO., LTD  
 億得得股份有限公司